




Protection helix

Protection helix in AISI 304 to avoid abrasion of the braid. As alternative to rubber cover in case of elevated temperatures.

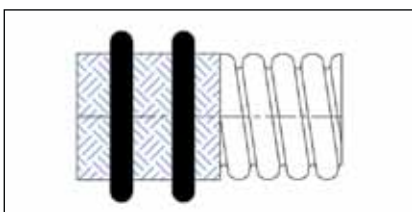


Scuff rings

Lightweight abrasion protection. Solves problems in installations where abrasion of the braid might be caused by pump vibrations. Temperature range up to 120°C.

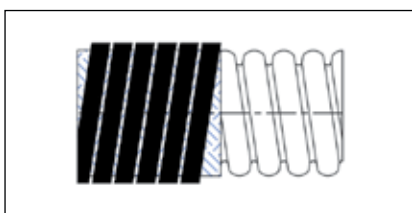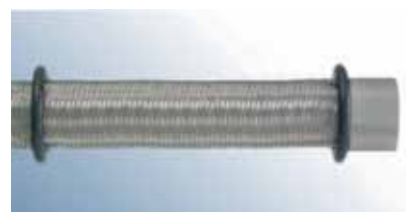

PVC coil

Lightweight PVC flat spiral. Insures protection where the hose is in contact with machinery or on manifolds where hoses are installed close to each other.

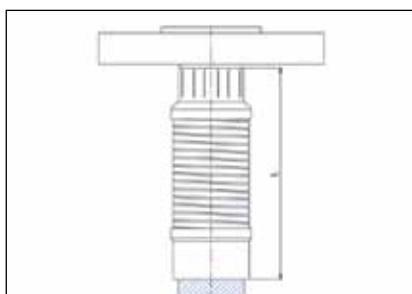

Stripwound metal hose guard

Stripwound metal hose guard. Avoids kinking of the hose at the fitting, a very rigid solution.

